




Enhanced performance and faster than ever before.

The ATS-MSXII 420 banding machine is the latest and most dynamic member of our popular MS product family.



Banding machine ATS-MSXII 420

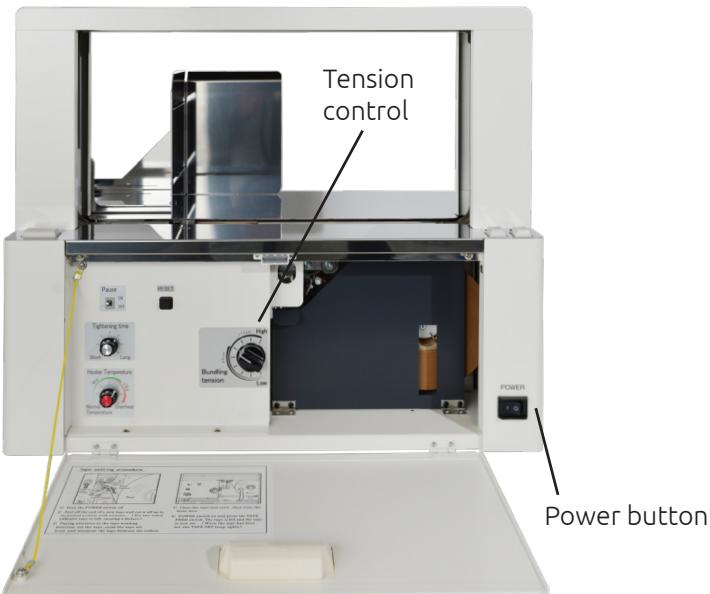

Technical information:

Width	560 mm (22.05 in)
Height	490 mm (19.29 in)
Weight	28 kg (61.73 lbs)
>Max. product width	410 mm (16.14 in)
>Max. product height	200 mm (7.88 in)
Min. product width	20 mm (0.78 in)
Min. product height	2 mm

The ATS-MSXII 420 table-top banding machine is ready for operation immediately after switching-on (no warm-up time). Banding with white/brown paper and transparent films with a width of 30 mm.

The ATS-MSXII 420 achieves up to 33 bandings per minute. The band tension is easily adjustable from 5 – 60 N, 20 N higher than its predecessor. The rounded edges and corners ensure safe operation.



Jumbo Dispenser

The high-quality Jumbo Dispenser transforms the table models of the ATS-MS series into stand-alone banding machines and allows the use of larger rolls. The wheels with brakes provide mobility and a secure hold. The Jumbo Dispenser can be easily assembled by the user.

Voltage	115 V
Power frequency	60 Hz
Max. cycles per minute	33
Arch width	420 mm (16.54 in)
Arch height	210 mm (8.27 in)

Product overview ATS heat sealing banding machines

Models	ATS-MSP 240, 30 mm	ATS-MSXII 420, 30 mm	ATS-MS 420S, 30/50 mm ATS-MS 380, 20 mm
Arch sizes	240 x 170 mm	420 x 210 mm	ATS-MS 420S, 30/50 mm = 400 x 200 mm ATS-MS 380, 20 mm = 380 x 170 mm
Max. number of cycles	ca. 26 / min.	ca. 33 / min.	ca. 27 / min.

Felins

W204N13055 Goldendale Rd Suite 400, Richfield, WI 53076
sales@felins.com
felins.com

© 09.2025 ATS-Tanner Banding Systems AG



Contact:

